


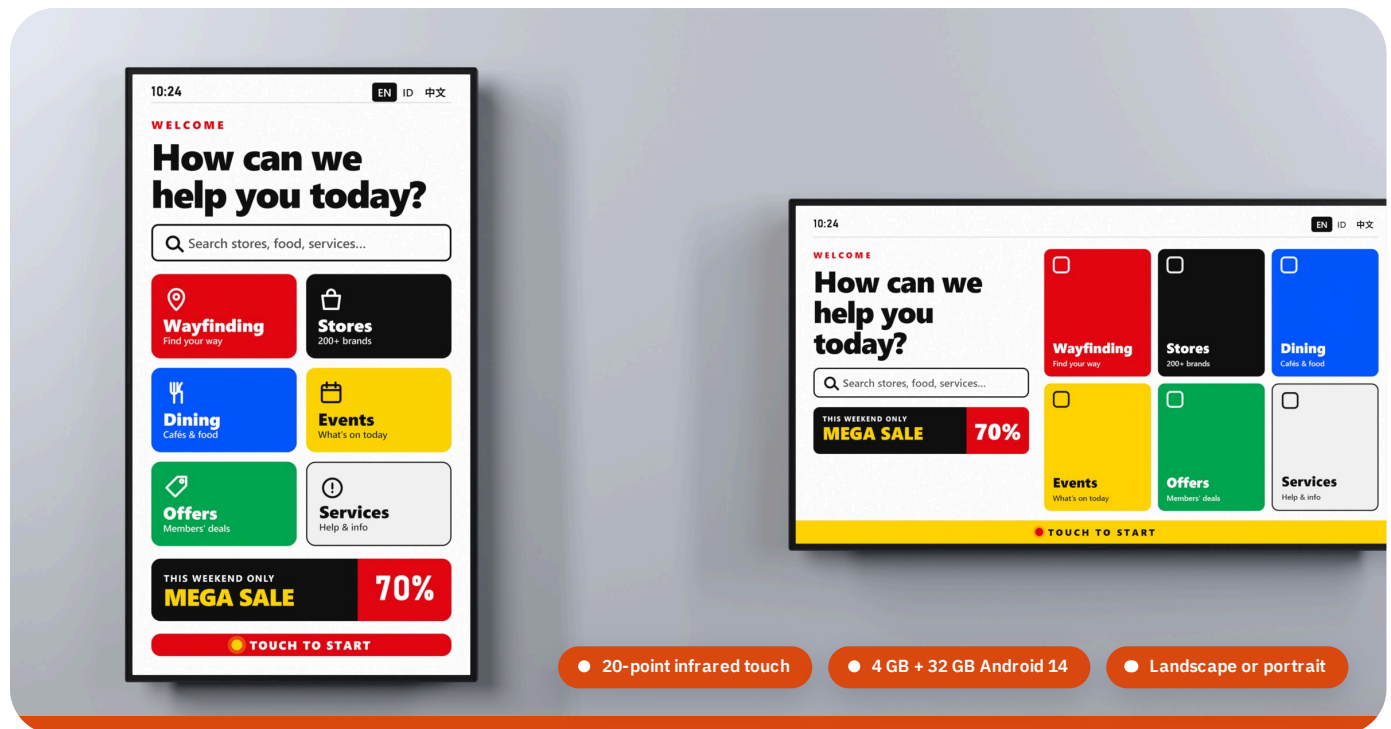

W SERIES • WALL-MOUNT TOUCH DISPLAY

Touch to engage. Right on the wall.

Self-service, wayfinding and catalogues with a responsive 20-point infrared touch frame over tempered glass. Fast 4 GB + 32 GB Android 14 platform, landscape or portrait.

AVAILABLE IN 43" 49" 55" 65" OKD-43W-TI - 65W-TI

20pts

Infrared multi-touch

4+32GB

Memory + storage


3years

Full-unit warranty



Slim profile

Shown: OKD-55W. The IR frame adds depth.

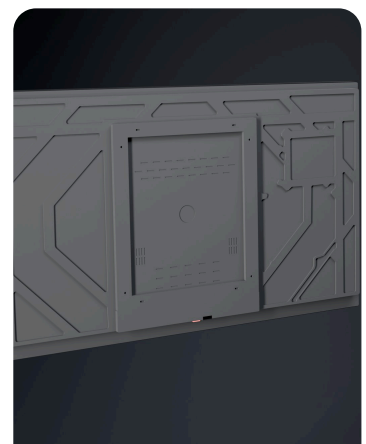

Clean rear

Stamped steel back with a built-in hanging frame; power switch and socket underneath.



20-point infrared touch

Works with a finger, glove or stylus; tempered glass front, plug-and-play over USB.



Fast Android platform

Quad-core Cortex-A55, Mali-G52 GPU, 4 GB RAM and 32 GB storage for smooth touch UIs.



Zero-code interactive pages

Build menus and directories in the CMS: tap to jump, play video, open web pages; auto-return when idle.



Landscape or portrait

The same unit hangs wide for menus and prices, or tall for posters and promos.



Hanging frame built in

Stamped steel rear with a built-in hanging frame. No extra bracket needed.



Cloud CMS included


Schedule landscape menus and portrait promos from one browser — no server to run yourself.

	43"	49"	55"	65"
Model	OKD-43W-TI	OKD-49W-TI	OKD-55W-TI	OKD-65W-TI
DISPLAY				
Panel	LCD · direct-lit LED backlight			
Resolution	1920 × 1080 Full HD			3840 × 2160 4K UHD
Orientation	Landscape or portrait (rotate 90°)			
Active area (mm)	940.6 × 529.2	1073.3 × 603.8	1209.1 × 680.2	1428.0 × 803.3
Brightness (typ.)	450 cd/m²		550 cd/m²	
Contrast ratio	1200:1 (typ.)			
Viewing angle	178° / 178°			
Colors	16.7 M (8-bit)			
Front surface	Tempered glass with infrared touch frame			
TOUCH				
Touch technology	Infrared (IR) touch frame			
Touch points	20 points			
Touch interface	USB, plug & play			
SYSTEM				
Operating system	Android 14 · Windows optional			
Processor	Quad-core Cortex-A55 · Mali-G52			
Memory / Storage	4 GB DDR4 / 32 GB eMMC			
Video decoding	8K H.265 decoding			
CONNECTIVITY				
Network	Gigabit LAN · 2.4/5G Wi-Fi · 4G optional			
I/O ports	USB 3.0 · USB 2.0 · HDMI in ×2 · RJ45 · 3.5 mm out · RS232/485 optional			
Audio	Stereo speakers 2 × 6 W			
Control	IR remote control · scheduled power on/off			
POWER				
Power input	AC 100–240 V, 50/60 Hz			
Power consumption (typ. / max)	95 / 125 W	135 / 170 W	195 / 235 W	245 / 290 W
Standby power	≤ 3 W			
MECHANICAL				
Dimensions W × H × D (mm)	979.8 × 568.4 × 80.0	1116.5 × 647.0 × 82.1	1252.3 × 723.4 × 82.1	1471.2 × 846.5 × 82.1
Bezel, all four sides	19.6 mm	21.6 mm		
Mounting	Integrated hanging frame · 4 × M6, 400 × 400 mm			
Package (mm)	1088 × 157 × 700	On request	1370 × 163 × 860	On request
Cabinet	Aluminium frame, stamped steel rear, black · fanless passive cooling · power switch and socket underneath			
ENVIRONMENT & SERVICE				
Operating environment	0 – 40 °C · 30 – 80 % RH (non-condensing)			
Accessories	Remote control, power cord, user manual			
Warranty	3 years			

* Model suffix TI = infrared touch. The IR frame adds depth and bezel width (see table). Images show the flush-glass front.

DIMENSIONS

TI · all sizes drawn to the same scale · unit: mm · W × H, depth D

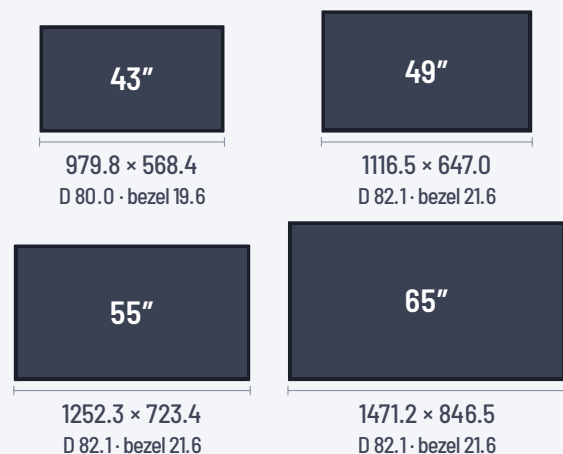

INCLUDED SOFTWARE · HOSTED BY ORKIDDO

Cloud CMS — manage every screen from one browser



Pure web-based

No client software — design, schedule and publish from any browser, on LAN, Wi-Fi or 4G.



Multi-zone layouts

Drag-and-drop split screens with video, images, web, weather, clock, streams and Office/PDF files.



Live data binding

Connect MySQL, Oracle or SQL Server to refresh prices, queues and tables in real time.



Interactive touch pages

Zero-code multi-page menus; tap to jump, play video, open web or apps; auto-return on idle.



Remote management

Heartbeat, live screenshots, timed power on/off, OTA updates and USB offline playback.



Governance & ads

Role-based access, one- or two-step content approval, ad billing and playback reports.