


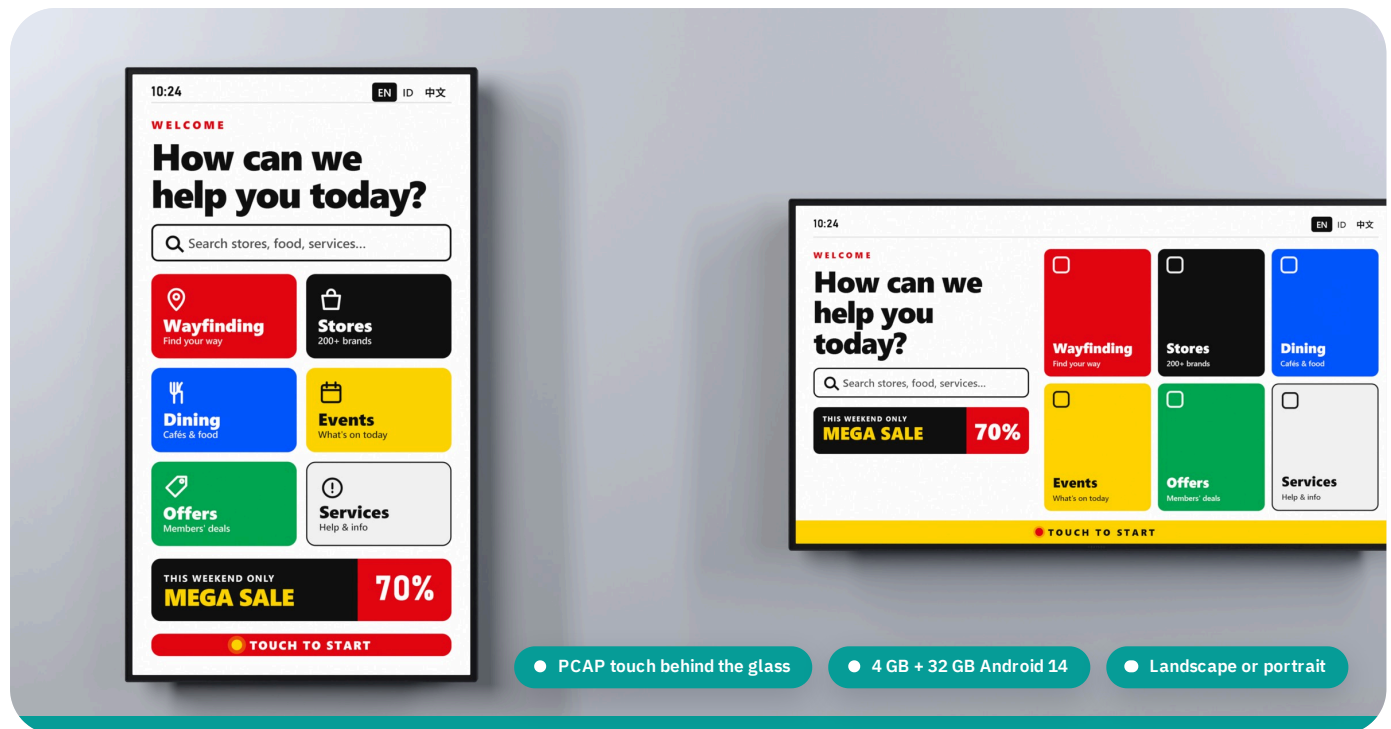

W SERIES · WALL-MOUNT TOUCH DISPLAY

Touch the wall. Find your way.


Directories, menus and self-service on a smartphone-like screen. Projected-capacitive touch behind G+G glass, on a fast 4 GB + 32 GB Android 14 platform — in landscape or portrait.

AVAILABLE IN **43"** **49"** **55"** **65"**

OKD-43W-TC - 65W-TC



75 mm slim
Hangs just 75 mm off the wall (55").

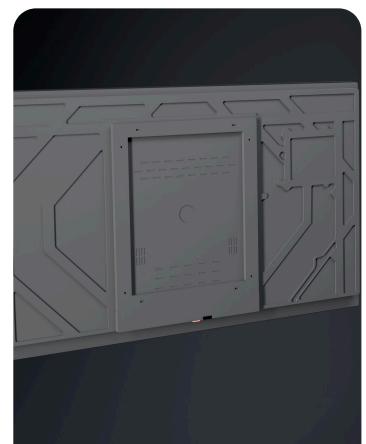

Clean rear
Stamped steel back with a built-in hanging frame; power switch and socket underneath.

20_{pts}

PCAP multi-touch



Capacitive touch, hidden sensor

PCAP sensor behind G+G glass: 20 points, smooth like a phone, a flat front that is easy to wipe clean.

4+32_{GB}

Memory + storage

3_{years}

Full-unit warranty



Fast Android platform

Quad-core Cortex-A55, Mali-G52 GPU, 4 GB RAM and 32 GB storage for smooth touch UIs.



Zero-code interactive pages

Build menus and directories in the CMS: tap to jump, play video, open web pages; auto-return when idle.



Landscape or portrait

The same unit hangs wide for menus and prices, or tall for posters and promos.



Hanging frame built in

Stamped steel rear with a built-in hanging frame. No extra bracket needed.



Cloud CMS included


Schedule landscape menus and portrait promos from one browser — no server to run yourself.

	43"	49"	55"	65"
Model	OKD-43W-TC	OKD-49W-TC	OKD-55W-TC	OKD-65W-TC
DISPLAY				
Panel	LCD · direct-lit LED backlight			
Resolution	1920 × 1080 Full HD			3840 × 2160 4K UHD
Orientation	Landscape or portrait (rotate 90°)			
Active area (mm)	940.6 × 529.2	1073.3 × 603.8	1209.1 × 680.2	1428.0 × 803.3
Brightness (typ.)	450 cd/m ²		550 cd/m ²	
Contrast ratio	1200:1 (typ.)			
Viewing angle	178° / 178°			
Colors	16.7 M (8-bit)			
Front surface	G+G glass (cover glass bonded to the PCAP sensor)			
TOUCH				
Touch technology	Projected capacitive (PCAP), G+G			
Touch points	20 points			
Touch interface	USB, plug & play			
SYSTEM				
Operating system	Android 14 · Windows optional			
Processor	Quad-core Cortex-A55 · Mali-G52			
Memory / Storage	4 GB DDR4 / 32 GB eMMC			
Video decoding	8K H.265 decoding			
CONNECTIVITY				
Network	Gigabit LAN · 2.4/5G Wi-Fi · 4G optional			
I/O ports	USB 3.0 · USB 2.0 · HDMI in ×2 · RJ45 · 3.5 mm out · RS232/485 optional			
Audio	Stereo speakers 2 × 6 W			
Control	IR remote control · scheduled power on/off			
POWER				
Power input	AC 100–240 V, 50/60 Hz			
Power consumption (typ. / max)	95 / 125 W	135 / 170 W	195 / 235 W	245 / 290 W
Standby power	≤ 3 W			
MECHANICAL				
Dimensions W × H × D (mm)	981.8 × 570.3 × 74.7	1118.5 × 648.9 × 76.8	1254.3 × 725.3 × 76.8	1478.2 × 853.4 × 76.8
Bezel, all four sides	20.6 mm	22.6 mm		25.0 mm
Mounting	Integrated hanging frame · 4 × M6, 400 × 400 mm			
Package (mm)	1088 × 157 × 700	On request	1370 × 163 × 860	On request
Cabinet	Aluminium frame, stamped steel rear, black · fanless passive cooling · power switch and socket underneath			
ENVIRONMENT & SERVICE				
Operating environment	0 – 40 °C · 30 – 80 % RH (non-condensing)			
Accessories	Remote control, power cord, user manual			
Warranty	3 years			

* Model suffix TC = projected-capacitive touch. Full HD on 43–55", 4K on 65".

DIMENSIONS

TC · all sizes drawn to the same scale · unit: mm · W × H, depth D

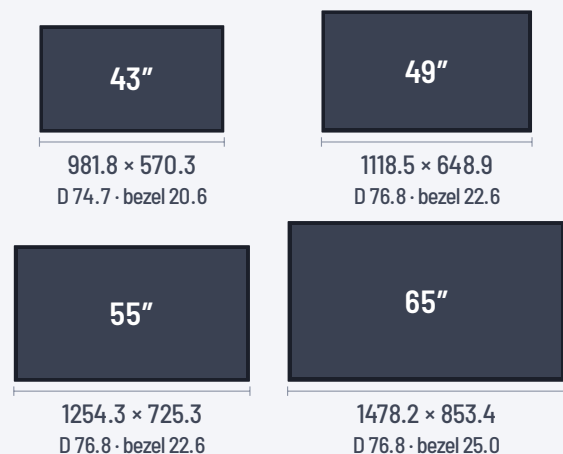

INCLUDED SOFTWARE · HOSTED BY ORKIDDO

Cloud CMS — manage every screen from one browser



Pure web-based

No client software — design, schedule and publish from any browser, on LAN, Wi-Fi or 4G.



Multi-zone layouts

Drag-and-drop split screens with video, images, web, weather, clock, streams and Office/PDF files.



Live data binding

Connect MySQL, Oracle or SQL Server to refresh prices, queues and tables in real time.



Interactive touch pages

Zero-code multi-page menus; tap to jump, play video, open web or apps; auto-return on idle.



Remote management

Heartbeat, live screenshots, timed power on/off, OTA updates and USB offline playback.



Governance & ads

Role-based access, one- or two-step content approval, ad billing and playback reports.